

Single bossed clamps

with DÄMMGULAST® yellow, galvanised

Field of application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for fixings in housing and industrial areas
- Suitable for fixings in industrial areas, as well as in air-conditioning, ventilation and sanitary areas
- For indoor use

Advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustments to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver

- Tightening bolts secured with captive washers
- Heavy duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- DÄMMGULAST® vibration control lining with yellow identification stripe: average sound level improvement up to 22 dB(A)




This product is awarded with the „Gütezeichen Rohrbohrung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



Features



Size	Max. recommended load [N]
3/8"-2"	1,700
70-83 mm	2,200
3"-6"	2,900
170-200 mm	3,500
212-225 mm	5,800

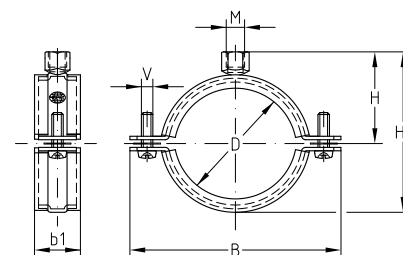

Connecting thread	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]					B	b1	H1	H	V
M8/M10	⅜		14–20	151359	100	pieces	64	23	55	35.5	M6 x 20
	½		21–26	151360			71		61	38.5	
	¾		26–30	151361			75		65	40.5	
	1		31–38	151362			81		71	43.5	M6 x 25
	1¼		40–47	151364			91		81	48.5	
	1½		48–54	151365			100		89	52.5	
		57	54–60	151366	105		94	55.0			
	2		60–66	151367	50		111	28	100	58.0	M8 x 35
		70	68–73	151369			126		109	62.5	
	2½		73–80	151370			131		114	65.0	
		83	82–87	151371			142		124	70.0	
	3		87–94	151372			146		128	72.0	M8 x 40
		102	99–104	151373			157		139	77.5	
		110	105–112	151374			166		148	82.0	
	4		112–118	151375			172		154	85.0	
		125	122–128	151376			182		164	90.0	
		133	132–137	151377			191		173	94.5	
	5		137–142	151378			196		178	97.0	
		144	142–148	151379			202		184	100.0	
		150	149–156	151380			210		192	104.0	
		160	159–164	151422			218		200	108.0	
	6		164–169	151423			223		205	110.5	
		170	169–172	151424			225		207	111.5	



Single bossed clamps can be produced in all other pipe sizes and types. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

Single bossed clamps with DÄMMGULAST® yellow, galvanised

Connecting thread	Size		Clamping range [mm]	Part no.	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]					B	b1	H1	H	V
M10/M12	⅜		14–20	151425	100	pieces	64	23	60	40.5	M6 x 20
	½		21–26	151426			71		66	43.5	M6 x 25
	¾		26–30	151427			75		70	45.5	
	1		31–38	151428			81		76	48.5	
	1¼		40–47	151430	91		86	53.5			
	1½		48–54	151431	50		100	94	57.5	M8 x 35	
		57	54–60	151432			105	99	60.0		
	2		60–66	151433			111	105	63.0		
		70	68–73	151435			126	28	114		67.5
	2½		73–80	151436			131		119		70.0
		83	82–87	151437			142		129	75.0	
	3		87–94	151438			146		133	77.0	M8 x 40
		102	99–104	151439			157	144	82.5		
		110	105–112	151440			166	153	87.0		
	4		112–118	151441			172	159	90.0		
		125	122–128	151442			182	169	95.0		
		133	132–137	151443			191	178	99.5		
	5		137–142	151444			196	183	102.0		
		144	142–148	151445			202	189	105.0		
		150	149–156	151446			210	197	109.0		
		160	159–164	151447			218	205	113.0		
	6		164–169	151448			223	210	115.5		
		170	169–172	151449			225	212	116.5		
		180	177–183	151450			25	235	223	122.0	
		200	197–203	151451	256			243	132.0		
		212	208–214	151452	284			46	256	138.5	M10 x 40
	8		217–225	151453	295				267	144.0	
		225	225–232	151454	304		274		147.5		
	M12/M16/ ½" ET	5		137–142	151455		50	196	28	187	106.0
		144	142–148	151456	202			193		109.0	
		150	149–156	151457	210			201		113.0	
		160	159–164	151458	218			209		117.0	
6			164–169	151459	25		223	214		119.5	
		170	169–172	151460			225	216		120.5	
		180	177–183	151461			235	227		126.0	
		200	197–203	151462			256	247		136.0	
		212	208–214	151463			284	46	260		M10 x 40
8			217–225	151464			295		271	142.5	
		225	225–232	151465			304		278	148.0	



Single bossed clamps can be produced in all other pipe sizes and types.
For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.