

MPC-Quick fasteners

with internal thread, galvanised

Field of application

- Secure and easy installation in slot of MPC-Support channel in order to attach mounting accessories
- Angle-mounting for fast and efficient installation of brackets and mounting angles

Advantages

- Time-saving attachment in the channel slot, even if subsequently fitted between existing pipe sections
- Simple and secure handling: insert in the MPC-Support channels, turn and the MPC-Quick fastener is fixed. No slipping, no falling out
- Adjustment marks on the side facilitate its positioning in the support channel
- High quality and load capacity
- Suitable for all MPC-Support channels 27/18 to 40/120



For profiles 27/18 and 28/30



For profiles 38/24 to 40/120



For angle mounting






Features



| Type | For support channels | Connecting thread | Part no. | Sales unit | Pack unit |
|----------------------|----------------------|-------------------|----------|------------|-----------|
| With internal thread | 27/18, 28/30 | M8 | 120858 | 100 | pieces |
| | | M10 | 120822 | | |
| | 38/24-40/120 | M8 | 120862 | | |
| | | M10 | 120826 | | |
| For angle mounting | | M8 | 120790 | | |
| | | M10 | 120782 | | |

MPC-Quick fasteners

with internal thread, galvanised

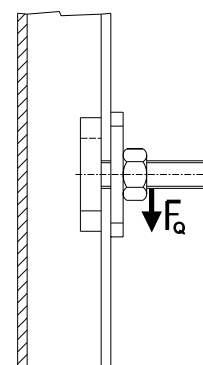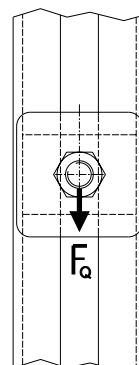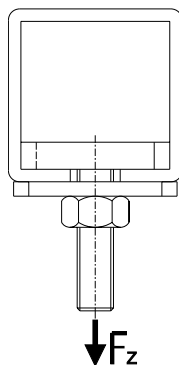

| For support channels | MPC-Quick fasteners | | | |
|----------------------|---------------------|---|---|---------------------------------|
| | Connecting thread | Max. recommended tensile load F_z [N] | Max. recommended transverse load F_q (displacement) [N] | For a tightening torque of [Nm] |
| 27/18 | M8 | 1,400 | 300 | 10 |
| | M10 | | | |
| 28/30 | M8 | 2,100 | 350 | |
| | M10 | | | |

| For support channels | MPC-Quick fasteners | | | | |
|----------------------|---------------------|---|---|------------------------------------|----|
| | Connecting thread | Max. recommended tensile load Fz [N]] | Max. recommended transverse load Fq (displacement) [N] | For a tightening torque of [Nm] | |
| 38/24 | M8 | 2,000 | 500 | 20 | |
| | M10 | | | 25 | |
| 38/40 | M8 | 2,800 | 1,000 | 20 | |
| | M10 | | | 25 | |
| 39/52 | M8 | 3,300 | | 20 | |
| | M10 | | | 25 | |
| 40/60 | M8 | 4,000 | | 20 | |
| | M10 | | | 25 | |
| 40/80 | M8 | | | 20 | |
| | M10 | | | 25 | |
| 38/80 | M8 | | | 2,800 | 20 |
| | M10 | | | | 25 |
| 40/120 | M8 | 4,000 | | 20 | |
| | M10 | | | 25 | |