

U-bolts DIN 3570


form A

Field of application

- Simple and efficient attachment of pipes to steel supporting structures, e.g. pipe bridges

Advantages

- Material S235JR (St37) according to DIN 17100 approved for operating temperatures up to 300°C

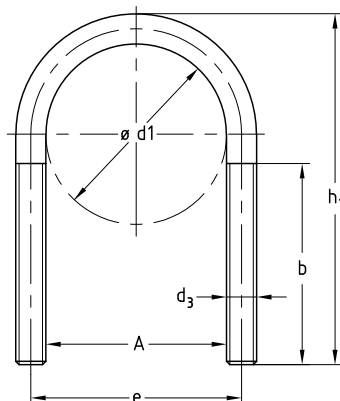

For pipe outer-Ø d1 [mm]	Nominal size DN	Part no.					Sales unit	Pack unit	Dimensions [mm]				
		untreated W37-OR	FVZ W37-OF	VZ W37-OV	V2A WA2	V4A WA4			A	b	d3	e	h1
20–22	15	124789	124786	131880	124709	124712	1	pieces	25	35	M10	35	65
25–27	20	124801	124798	124804	124724	124727			30	40		40	70
30–34	25	124822	124819	124825	124736	124739			38	50		48	76
38–43	32	124847	124844	124851	124748	124751			46		56	86	
45–49	40	124866	124863	124869	124770	124773			52		62	92	
57–61	50	124956	124953	124959	124896	124899			64	M12	76	109	
77	65	124973	124970	124976	124908	124911			82		94	125	
89	80	124982	124979	124985	124914	124917			94		106	138	
108–115	100	125039	125036	125042	124988	124991			120	60	M16	136	171
133–140	125	125058	125055	125061	125000	125003			148			164	191
159–169	150	125076	125073	125079	125012	125015			176			192	217
191–194	175	125094	125091	125097	125024	125027			202	218	249		
216–220	200	113135	113132	113138	125112	125115			228	70	M20	248	283
267–273	250	113162	113159	113165	113114	113117			282			302	334
318–324	300	113141	113225	113144	113126	113129			332			352	385
356–368	350	113240	113237	113243	113189	113192			378	M24	402	435	
407–419	400	113261	113258	113264	113201	113204			428		452	487	
508–521	500	113282	113279	113285	113213	113216			530		554	589	

Material	Code	Surface	Code for surface
S235JR (St37)	W37	untreated	OR
V2A stainless steel	WA2	hot-dip galvanised	OF
V4A stainless steel	WA4	galvanised	OV



U-bolts are supplied excluding nuts and washers. Order separately if required (refer to chapter „Accessories“).